

Hanging items with factory fitted hangers

IMPORTANT

⚠ When drilling into walls, always check there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesman if you are unsure.

⚠ **MIRRORS:** Potential Fire Hazard. Keep out of direct sunlight.

Do not use wire or string to support the frame. Use only the supplied hangers fixed to the back of the product.

Ensure that the wall and wall fixings are suitable for the weight of the product and securely tightened.

Do not install a mirror or frame in damp conditions such as a bathroom unless it is sold in our bathroom section. Otherwise material may warp and the product may get damaged.

We recommend two people to install heavy or large frames.

We recommend that you check the product periodically to make sure no fittings or fixings have loosened or require attention.

Do not strike glass with hard or pointed objects.

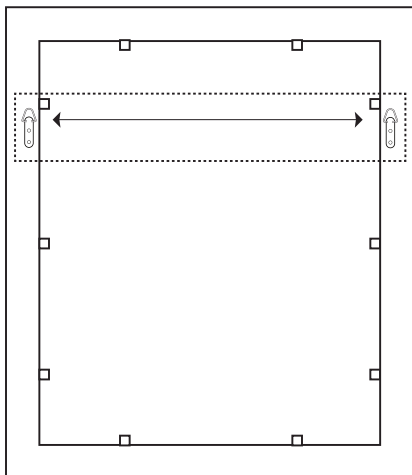
Do not place hot or cold items against the glass.

To clean mirrors and glass, use a soft damp cloth only, for canvases and wall art only use a dry cloth or duster.

This information should be retained for future reference.


Step 1:

Use a piece of masking tape as a template, mark the distance between the fittings. Remove the masking tape carefully from the product.



Step 2:

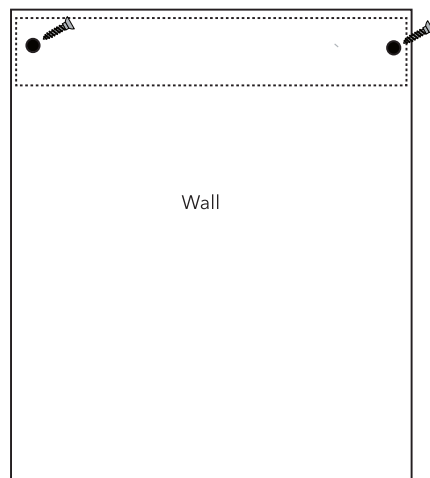Position the masking tape on the wall and fix appropriate size and strength fixings.



Fixing items to a wall

IMPORTANT

⚠ When drilling into walls, always check there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesman if you are unsure.

HINTS








General Rule: Always use a large screw and wall plug if you are not sure.

Ensure you use the recommended drill bit to match the wall plug and hole size.

Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.

Take extra care when drilling high walls, ceiling and ceramic tiles. Ensure the plug is fitting below the ceramic tile to avoid splitting or cracking.

Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Wall Type	General wall material	Aerated / Breeze block	Plasterboard, partitions or hollow wooden doors	Concrete block or brick wall stuck with plaster
Light Load	 Standard Wall Plug	 General Purpose Wall Plug	 Cavity Fixing Wall Plug	 Hammer Fixing Wall Plug
Heavy Load		 Shield Anchor Wall Plug	 Cavity Fixing Heavy Duty Wall Plug	 Hammer Fixing Wall Plug

CARE AND MAINTENANCE

We recommend that you check the product periodically to make sure no fittings or fixings have loosened or require attention.